

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/339599881>

Heuristic Modelling of traffic accident characteristics

Article in *Transportation Letters The International Journal of Transportation Research* · February 2020

DOI: 10.1080/19427867.2020.1734273

CITATION

1

READS

548

3 authors, including:




[Serkan Tapkin](#)

Antalya Bilim University

52 PUBLICATIONS 566 CITATIONS

[SEE PROFILE](#)

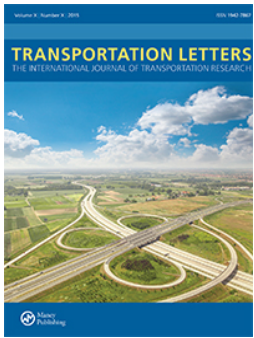

Transportation Letters

The International Journal of Transportation Research

ISSN: 1942-7867 (Print) 1942-7875 (Online) Journal homepage: <https://www.tandfonline.com/loi/ytrl20>

Heuristic Modelling of traffic accident characteristics

Emre Tercan, Erkan Beşdok & Serkan Tapkın

To cite this article: Emre Tercan, Erkan Beşdok & Serkan Tapkın (2020): Heuristic Modelling of traffic accident characteristics, Transportation Letters, DOI: [10.1080/19427867.2020.1734273](https://doi.org/10.1080/19427867.2020.1734273)

To link to this article: <https://doi.org/10.1080/19427867.2020.1734273>



Published online: 29 Feb 2020.



Submit your article to this journal [↗](#)



View related articles [↗](#)



View Crossmark data [↗](#)



Heuristic Modelling of traffic accident characteristics

Emre Tercan ^a, Erkan Beşdok ^b and Serkan Tapkın ^c

^aDepartment of Survey, Project and Environment, 13th Region, General Directorate of Highways, Antalya, Turkey; ^bDepartment of Geomatics Engineering, Erciyes University, Kayseri, Turkey; ^cDepartment of Civil Engineering, Antalya Bilim University, Antalya, Turkey

ABSTRACT

Due to the complex structure of observation based traffic accident data and the absence of an analytic model to define their characteristics, different models are required. Accident characteristics have been modeled for different road segments with two different methods: evolutionary data clustering method and resilient neural networks. In the first method, observation data was clustered using an evolutionary search-based clustering algorithm. The first method is based on determining whether observation based test data have the conditions of a possible death or injury accident based on the distance to the cluster centers obtained. The second one is a regression method that predicts whether an accident will cause death or injury according to observation based traffic data in test road segments by using resilient neural networks. Experiment results show that data analysis methods are very effective in determining the existence of the conditions that may cause accidents resulting in death or injury.

KEYWORDS

Traffic accident; traffic safety; data clustering; resilient neural networks; evolutionary computation; optimization; differential search algorithm; Calinski-Harabasz index

Introduction

More than 1.2 million people die and about 50 million people suffer temporary injuries or become permanently disabled every year from traffic accidents around the world. In case of failure in ensuring traffic safety and taking necessary precautions, it is predicted that the number of people who will die or get injured in traffic accidents will increase by 65% around the world until 2020 (WHO 2009; Van Beeck, Borsboom, and Mackenbach 2000). Traffic accidents still cause catastrophic socio-economic losses because of injuries and permanent loss of bodily functions in many countries every year (WHO 2009). The differences in local and cultural traditions in transportation, topographical and seasonal conditions, development levels of transportation infrastructures and levels of traffic habituals in societies make it difficult to put forward global conclusions about the parameters causing traffic accidents. Therefore, in order to model the relations between the parameters causing traffic accidents on bias basis, working on a scale of the country, region, and highway separately provides more accurate conclusions. Traffic accidents have the potential to cause catastrophic socio-economic losses. Therefore, the development of new technologies is still essential to take protective and preventive actions against traffic accidents. Apprehending the relations between the parameters that cause traffic accidents are very beneficial in developing new preventive technologies against traffic accidents. Human behavior (i.e. driver (Teran-Santos, Jimenez-Gomez, and Cordero-Guevara 1999; Wang et al. 2014), passenger, and pedestrian behaviors (i.e. alcohol, hand-held cell phone, sleepiness) (Sutlovic et al. 2014; Nikolaev, Robbins, and Jacobson 2010; Burger, Kaffine, and Yu 2014; Moradi, Nazari, and Khaled 2019), vehicle properties (i.e. type, age, structure of vehicles) (Almeida et al. 2013; Hsu et al. 2015; Yau, Lo, and Fung 2006), road and environmental factors (Xu et al. 2018) are among the most important parameters collectively causing traffic accidents. Complex relations between relevant traffic parameters make it difficult to model the relations between such parameters with analytic methods. Therefore, utilizing modern data processing methods is a frequently used approach (Thakur 2014; Liu, Solomon, and Hardy 2015; Fan et al. 2019).

Turkey located in the southwest of Europe has a population of about 82 million. According to the statistics of the end of 2017, Turkey has a total of 67333 km national main highways and 12532 km national railways. The number of motor vehicles per 1000 people is 275. Fifty-four percent of 22218945 vehicles in traffic consist of personal automobiles. According to observation-based traffic accident data of 2017, the number of daily average traffic accidents is 3295 and 20 people die and 823 people get injured because of these accidents. A total of 49656 people have died and 2568996 people have sustained injuries or become permanently disabled in the 1498160 traffic accidents happening in the last ten years in Turkey (GDH 2017). The statistical results given above show that traffic accidents are very important socio-economic disasters for Turkey. Traffic and transportation problems have evolved in Turkey because of the rapid increase in population and the number of motor vehicles in traffic; therefore, these problems require developing new traffic-calming techniques and making massive transportation infrastructure investments. Road transport is more frequently used in comparison to other modes of transport in Turkey. The traffic density in the highway networks has increased because of the continual improvement of the nation. Due to the inadequacy of highway networks, irregularities in maintenance and operation conditions and partial modernization of traffic control systems in Turkey, relatively new public policies such as proliferation of mass transportation, improvement of railways and proliferation of smart transportation systems remain inadequate. In addition to, the increase in load and passenger demand, environmental conditions, negative results of extreme seasonal differences, highway design problems, and adverse behaviors of drivers and pedestrians increase the number of traffic accidents.

In this paper, the traffic accidents happened between 2012 and 2013 on 7 divided roads in Turkey have been investigated. The total length of related divided roads is 1408 km and 506 people have died and 18441 people have sustained injuries or have become permanently disabled on the accidents studied in this paper. This paper aims to study the relations between the traffic accident parameters

causing traffic accidents resulting in death or injury by analyzing observation-based traffic accident data sets consisting of 23 parameters compiled from official reports of traffic accidents happened in the above mentioned divided road segments. The data produced on the basis of simulations or observations is used to analyze the relations between the parameters causing traffic accidents scientifically. Generally, obtaining observation data is more difficult and expensive. However, observation data provides more realistic results than simulation data. This study contributes to filling the gap due to the lack of an analytical method to identify the factors that cause traffic accidents. Our main contributions to scientific research for traffic accident characteristics modelling are summarized as follows:

- (1) The relationship between death and injury accidents is modeled with observation data consisting of 23 different parameters that cause traffic accidents.
- (2) A novel differential search algorithm (DSA) based evolutionary clustering method is proposed.
- (3) Resilient neural networks (Rprop) Based Regression method is used in order to modelling traffic accident characteristics.
- (4) It is analyzed whether there is a consistency between the observation-based traffic data and the estimated traffic accident data.
- (5) Data model can be provided to decision support mechanisms for traffic flow management in the prevention of accidents.

The rest of the paper is organized as follows: [Section 2](#) describes the Literature review, [Section 3](#) introduces Structure of data set, [Section 4](#) describes the Data analyzing methods for modelling traffic accident characteristics, and [Sections 5 and 6](#) presents the Experiments and Conclusions, respectively.

Literature review

In the literature, by using various methods, lots of studies have been undertaken to examine traffic accident data (Shafabakhsh, Famili, and Akbari 2016; Ryder et al. 2017; Briz-Redon, Martinez-Ruiz, and Montes 2019a, 2019b). Decision trees (Jung, Qin, and Oh 2016) are frequently used in literature because they are easy to construct and comprehend. When traffic accident data were analyzed on the basis of classification and regression trees, vehicle type was found to be the most important parameter affecting traffic accidents (Arenas Ramirez et al. 2009; Chang and Wang 2006). When traffic accident data were analyzed with classification and regression trees, improperly passing and not fastening a seatbelt were found to be the most important parameters increasing the severity of injury (Thomas 1990; Kashani and Mohayman 2011). When the traffic accidents of trucks were analyzed by using classification and regression trees, alcohol intake by drivers, not-fastening seatbelts, vehicle and collision type and a number of vehicles were found to be relatively the most effective parameters affecting the severity of injury (Chang and Chien 2013). When regression methods (Lord and Mannering 2010) were used to determine more effective parameters in traffic accidents causing injury, the reason and location of accidents were found to be relatively the most effective factors (Al-Ghamdi 2002). Logistic regression method is another method that enables the analysis of injuries and fatal accidents. In this study (Bedard et al. 2002), they analyzed that the fastening of a seatbelt seriously decreases accidents end up with injury by using logistic regression method. When ordered probit model was used to analyze observation-based traffic data; sex and age of driver, fastening seatbelt, driving speed, vehicle type, and collision location were found to be relatively the most important parameters on injury severity (Gomei et al. 2013). In Briz-Redon et al. (2019a,

2019b), statistical and conditional autoregressive modelling-based methods were used to analyze the traffic accident risks around schools. Bayesian networks are one of the methods used to determine traffic accidents without any assumptions (De Ona, Mujalli, and Calvo 2011; Mujalli and De Ona 2011; De Ona et al. 2013; Karimnezhad and Moradi 2017). In (De Ona et al. 2013), latent class clustering method and Bayesian networks were used together in the analysis of traffic accidents. Bayesian networks were used to determine the relation between 18 parameters including driver, vehicle, road, and environmental properties causing traffic accidents. New methods were developed to decrease the number of variables to obtain more successful data analyses and optimize the structure of Bayesian Networks used in the analysis of traffic accidents (Mujalli and De Ona 2011). Karimnezhad and Moradi (2017) analyzed strongly related traffic parameters using a bayesian network-based model for traffic accident analysis. Haridwar and Uttarakhand in India have utilized latent class clustering (LCC) and k-modes clustering techniques to analyze traffic accident data verification. The obtained results were found to be verifying heterogeneity in the data set and the utilized clustering techniques were deemed to lessen this heterogeneity in an effective manner (Kumar, Toshniwal, and Parida 2017). Artificial neural networks were also used to model the relation between the severity of injury and parameters causing traffic accidents (Sliupas and Bazaras 2013; Delen, Sharda, and Bessonov 2006; Zeng et al. 2016). Artificial neural networks were used to prioritize the factors with regard to traffic accidents (Delen, Sharda, and Bessonov 2006) and to detect the parameters causing traffic accidents (Moghaddam, Ziyadi, and Afandizadeh 2011). The variables such as highway width, head-on collision, vehicle defects, following distance, failure in adequate auditing of physical and technical qualifications of vehicles, speeding violations, and running-off-road are other parameters that increase the severity of traffic accidents. Genetic algorithm, pattern search, and artificial neural networks were used to analyze the data set of total 1000 traffic accidents happening on Tehran-Ghom highway in 2007 and it was observed that relatively the most effective traffic accident model could be established by using artificial neural networks (Kunt, Aghayan, and Noii 2012). Such methods as artificial neural networks and ANFIS (adaptive network-based fuzzy inference system) were frequently used to classify the severity of injury in traffic accidents happening on highways (Ali khani, Nedaie, and Ahmadvand 2013). The methods using k-means clustering and self-organizing maps as hybrid were developed to increase the classification accuracy of injury severity. In (Jafari et al. 2015), highway traffic death rate was predicted according to World Health Organization data by using artificial neural network optimized with a genetic algorithm.

Structure of data set

In this paper, 23 different parameters affecting traffic accidents in Turkey between 2012 and 2013 were used. These parameters were obtained from seven different divided road segments belonging to different geographical regions of Turkey. This data was provided by the Republic of Turkey General Directorate of Security. Thirty different control section points on total of 1408 km length roads have been chosen amongst 7 axis for research. The divided roads have been constructed from asphalt concrete. Geographical positions of road segments, which are the main objective of this paper, are shown in [Figure 1](#).

A number of investments have been made in recent years to improve the highway transportation network and meet the constantly increasing needs of the dynamic Turkish economy. [Table 1](#) includes the changes in various traffic parameters in Turkey year by year. The number of accidents including death or injury tends to

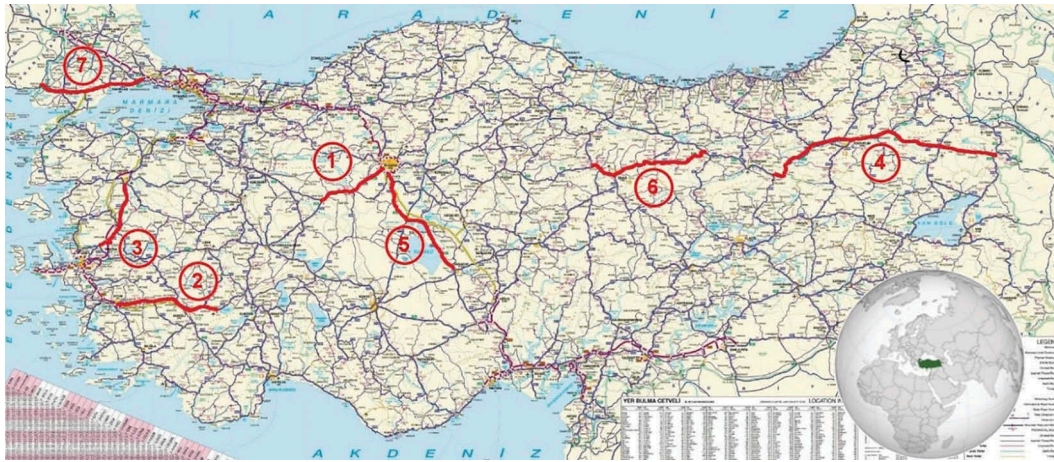


Figure 1. Seven different road segments in Turkey (Turkish Road Network Map 2020).

Table 1. The changes in various traffic parameters in Turkey between 2008–2017.

Year	Population (x1000)	Number of drivers (x1000)	Number of motor vehicles (x1000)	Number of accidents	Accidents with fatality or injury	Number of fatals	Number of injured ones
2008	71.517	19.377	13.765	950120	104212	4236	184468
2009	72.561	20.460	14.316	1053346	111121	4324	201380
2010	73.723	21.548	15.095	1106201	116804	4045	211496
2011	74.724	22.798	16.089	1228928	131845	3835	238074
2012	75.627	23.760	17.033	1296634	153552	3750	268079
2013	76.668	24.778	17.939	1207354	161306	3685	274829
2014	77.696	25.972	18.828	1199010	168512	3524	285059
2015	78.741	27.489	19.994	1313359	183011	7530	304421
2016	79.815	28.223	21.090	1182491	185128	7300	300812
2017	80.811	28.181	22.218	1202716	182669	7427	300383

increase rapidly as the number of vehicles increase in a considerable trend in Turkey (Table 1). The relevant statistics given in Table 1 have been published by the Turkish Statistical Institute, TUIK (Traffic Statistics 2018). The number of death cases in traffic accidents prior to 2015 given in Table 1 does not include the number of death cases in hospitals after the accident due to accident-related causes. In the experiments carried out in this paper, the numbers of death cases, which occurred at the time of the accident and officially reported in the field, were used.

When Table 1 is reviewed, it can be easily observed that new methods should be developed to understand the relations between the parameters causing traffic accidents in Turkey. Considerable number of traffic accidents have occurred in these segments. In addition, these segments differ from each other in the north-south and east-west directions. Therefore, they have different geographical characteristics. The observation-based traffic data consists of 23 different parameters compiled from official reports of 8078 traffic accidents happened on national highways between 2012 and 2013. While determining the parameters affecting the traffic accidents, 23 different parameters which are included in the accident reports were preferred. These are listed in Table 2.

Data analyzing methods for modelling traffic accident characteristics

In this paper, observation data of traffic accidents including death and injury were used to determine traffic accident characteristics of relevant seven road segments. The numerical methods and analysis used for the determination of traffic accident characteristics are introduced in this chapter.

Table 2. Parameters affecting traffic accidents.

ID	Parameters
1	Is settlement?
2	Out of settlement?
3	The number of vehicle = 1?
4	The number of vehicle > 1?
5	Is weather clear?
6	Is weather rainy?
7	Is weather foggy or snowy?
8	Is it daytime?
9	Is it night or twilight?
10	Is the pavement dry?
11	Is the pavement wet?
12	Is the pavement icy or snowy?
13	Is there any alignment made?
14	Are there any horizontal curves?
15	Is the road curved vertically?
16	Is the road not curved vertically?
17	Is there a junction on the road?
18	Is there no junction on the road?
19	Is it a rear-end collision?
20	Is it a rollover?
21	Is it a run-off-road?
22	Is it a side collision?
23	Is it a collision with a pedestrian or fixed object?

Preliminary analysis

When piecewise *pearson correlation product* values (r) of the observation of fatal accidents are analyzed statistically, these observations were calculated as random variables in normal distribution defined with $N(\mu, \sigma) = N(0.3863, 0.2869)$. For 34.59% of observations: $r \geq 0.5$. For r values of the observations of accidents including injury $r \sim N(0.3271,$

0.3117) was calculated. In this case, for 28.95% of observations in the accidents including injury: $r \geq 0.5$. These simple statistical results show that the parameters chosen for the examination of traffic accidents can be used to examine the traffic accidents including death and injury. Total observation values of the parameters in the traffic accidents including death and injury are given in Figures 2 and 3.

Evolutionary search-based data clustering

Clustering techniques (Jain, Murty, and Flynn 1999) can be used to understand whether there is a relation between the observation data of traffic accidents and estimated results. In accordance with previously defined rules, data clustering techniques allow researchers to allocate data set elements to k-means clustering (Kanungo et al. 2002) consisting of data set elements sharing similarity with each other most. It is perhaps the most frequently used unsupervised learning technique in various fields such as clustering machine learning, marketing, pattern recognition, spatial database applications, medical diagnostics, image processing, computational biology, bioinformatics, and observation-based traffic data analysis. Frequently used clustering algorithms (i.e. k-means (KM) (Kanungo et al. 2002), Fuzzy C-Means (FCM) (Bezdek, Ehrlich, and Full 1984), Self-Organizing Map (SOM) (Kohonen 1990)) are based on minimizing the sum of the distance between cluster elements and cluster center (i.e. centroids). In addition, probability-based clustering techniques (i.e. Gaussian Mixture Models (Maugis, Celeux, and Martin-Magniette 2009), Expect maximization algorithm (Ruxanda and Smeureanu 2012)) connectivity-based clustering models (i.e. hierarchical clustering (Chen et al. 2015)) and graph-based clustering methods (i.e. Minimal spanning tree-based clustering (Chowdhury and Murthy 1997)) are also frequently used for data partition. KM, which is a partitional clustering method, determines the initial values of centroid locations randomly. This affects the performance of KM radically as the number of clusters increase. If the performances of clustering algorithms are over-sensitive to initial values of their parameters, finding the best solution among the multiple-runs results is the most frequently preferred solution. Data clustering achievements of KM, FCM, and SOM are generally more sensitive

to the number of clusters and this achievement decreases as the number of clusters increase.

Classical optimization methods are fast, deterministic, and stable. While classical methods produce the expected accuracy in low dimensional, simple geometry and linear problems, they can produce rough results in complex and multivariate problems. Evolutionary search based are used in the solution of restricted-unrestricted, continuous-discrete, linear-nonlinear, single-multivariate or differentiable-non differentiable problems. Traffic accident observations are complex and difficult to model. Evolutionary search-based data clustering methods are frequently used in various engineering problems (Günen, Atasver, and Beşdok 2017; Çivicioğlu et al. 2018). Using evolutionary computing algorithms (EA) for data clustering has become an important field of research (Wang, Yuan, and Cheng 2015; Hong, Chen, and Lin 2015). Generally, EAs need longer periods of time than KM, FCM, and SOM to calculate the location of the centroids. Additionally, EAs avoid local solutions better than classic clustering methods. In this paper, DSA (Çivicioğlu 2012) has been used to compute more reliable centroid values. Since DSA randomly controls the internal parameters, it does not need optimal adjustment of the initial values of the internal parameters. Therefore, DSA's numerical problem-solving success is not significantly sensitive to the initial values of its internal parameters. DSA's strategy for crossover and generating scale-values gives it the capacity to avoid local solutions. Also, the structure of DSA is simple and this makes it easy to adapt to different numerical problems. The Bartlett's test (Ma, Lin, and Zhao 2015) with significance level 0.05 was used to understand whether each of 23 observation parameters affects estimated results separately. The results showed that all of 23 parameters are necessary to explain nonrandom variation in observation-based traffic data. It is difficult to determine the number of optimum k-cluster in clustering applications. Various clustering validation indexes are frequently used to determine clustering validity and optimum k value. Frequently used clustering validation indexes (Gunter and Hunke, 2003) are Silhouette index, Davies-Bouldin index, Calinski-Harabasz index, Dunn index, C index, Krzanowski-Lai index, Hartigan index, Weighted Inter-Intra index and gap-statistics (Tibshirani, Walther, and Hastie 2001). Quality indexes are widely

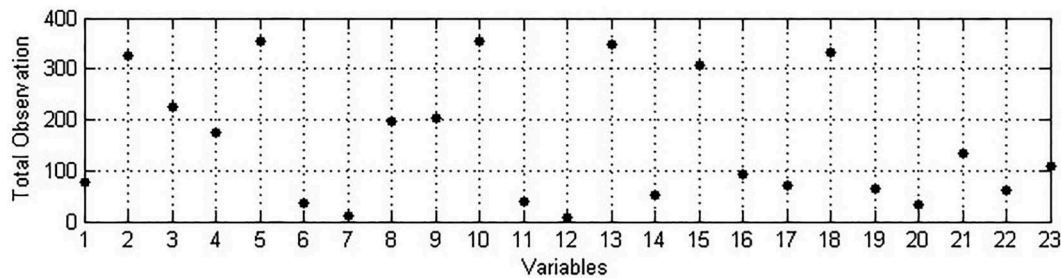


Figure 2. Total observations of variables for fatal traffic accidents.

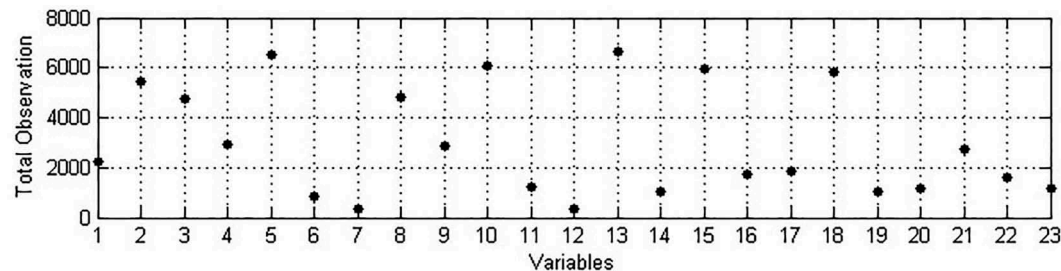


Figure 3. Total observations of variables for injury traffic accidents.

used to determine the optimal number of clusters in unsupervised classification. Calinski-Harabasz index uses only euclidean-based attributes when investigating the optimal number of clusters. Therefore, it works very fast and its structure is simple. The most obvious differences between Calinski-Harabasz index and other quality indexes are that Calinski-Harabasz index is simple in structured, can provide high accuracy, and works fast when processing big data. Calinski-Harabasz clustering index (Caliński and Harabasz 1974) was used in this paper to determine the number of optimum cluster (i.e. k) in clustering analysis used to analyze whether traffic observation sets verify traffic estimated results. Calinski-Harabasz index is defined by using Equation 1.

$$VRC_k = \frac{SS_B}{SS_W} \cdot \frac{(N - k)}{(k - 1)} \quad (1)$$

where SS_B , SS_W and k denotes overall variance between-clusters, the overall variance within clusters and number of clusters, respectively. N denotes the number of observations. The SS_B is defined by using Equation 2;

$$SS_B = \sum_{i=1}^k n_i \cdot \|m_i - \mu\|^2 \quad (2)$$

where m_i and μ denote centroid of i^{th} cluster and overall mean of the sample data, respectively. SS_W is defined by using Equation 3;

$$SS_W = \sum_{i=1}^k \sum_{x \in c_i} \|x - \mu_i\|^2 \quad (3)$$

x is an observation point and c_i is the data appointed to i^{th} cluster. Well-defined clusters have relatively higher SS_B value and relatively lower SS_W value. The k value that provides the highest VRC_k value gives the best k value to be used for partition of relevant data to clusters. Calinski-Harabasz index values of observation-based traffic data set used in this paper are given in Figure 4 for $k = 2, 3, 4, \dots, 30$. As seen in Figure 4, $k = 2$ is the most suitable option for the observation-based traffic data set used in this paper. Therefore, $k = 2$ value has been used to examine the relations between traffic parameters.

If the clustering results verify the estimated results, the estimated results of the test observations are generated using the clustering parameters. Clustering observation-based traffic data according to estimated results make it possible to remove estimated results from outliers in the observation data. In this paper, coherence of observation data with estimated results was examined by using a conditioned-clustering method (Gönen, Atasever, and Beşdok 2017) defined with objective function given in Equation 4.

$$\arg \min_c \left| \left(\sum_{i=1}^u \sum_{x \in c_i} \|x - \mu_{c_i}\| \right) - t_i \right| \quad (4)$$

where u and t denote the number of total clusters and estimated results of data appointed to i^{th} cluster, respectively. t shows the traffic accidents including death and/or injury with a binary valued vector. Defined problem in Equation 4 has been solved by using DSA. DSA is a population based, iterative evolutionary search-based numerical optimization algorithm. DSA was used for the solution of various optimization problem types (Çivicioğlu 2012; Alhalabi and Dragoi, 2017; Gönen, Çivicioğlu, and Beşdok 2016; Guha, Roy, and Banerjee 2017). DSA has the phases such as initialization, selection of parents, mutation, and selection of new population members like other evolutionary algorithms. In DSA, population is defined as a super-organism consisting of clans including elements as much as the extent of the problem. DSA has four different mutation strategies. The first mutation strategy is a bijective strategy which ensures that each clan evolves into another clan in each iteration step. The second strategy is a surjective strategy which allows clans to evolve into the clans providing relatively better solutions with a random probability. In this strategy, more than one clan can evolve into a clan proving relatively better solutions. The third mutation strategy forces all clans to evolve into the clans which provide relatively better solutions only in limited numbers. The fourth mutation strategy evolves clans into the clans which provide the best solutions among all clans. Therefore, mutation strategies of DSA are elitist except for the first mutation strategy. DSA can use different random number generators to scale the direction matrix. This allows DSA to benefit from different scaling strategies. Generally, DSA searches for the numerical solution of which search space is looked for, with a random walk-based strategy. The clan members to be mutated in an iteration are chosen with a random probability. DSA is a simple and robust algorithm (Çivicioğlu 2012; Gönen, Çivicioğlu, and Beşdok 2016). The structure of bijective DSA is given in Figure 5.

Resilient neural networks (rprop) based regression

Rprop is a local-adaptive learning algorithm developed for Multilayer Perceptron (MLP) neural networks (Saini 2008; Beşdok, Çivicioğlu, and Alci 2004; Dutta, Chatterjee, and Rakshit 2006). Backpropagation learning algorithm is the supervised learning algorithm which is most frequently used for MLP neural networks. Fundamental system equation of backpropagation learning is given in Equation 5;

$$\frac{\partial E}{\partial w_{ij}} = \frac{\partial E}{\partial s_i} = \frac{\partial s_i}{\partial net_i} = \frac{\partial net_i}{\partial w_i} \quad (5)$$

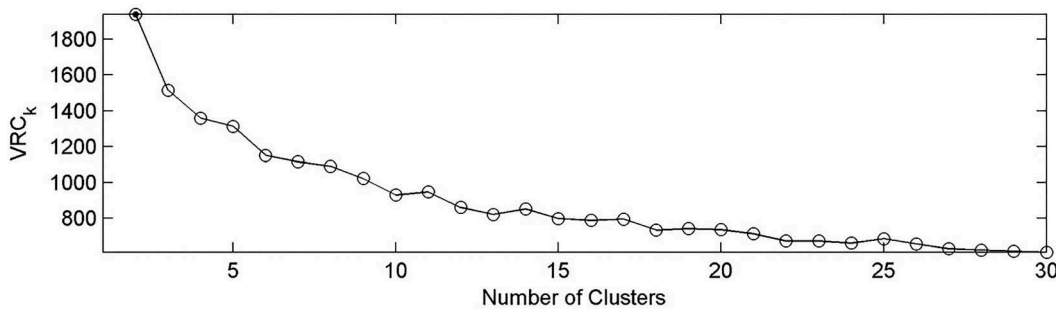


Figure 4. Calinski-Harabasz index values for the observation-based traffic data-set.

```

Input: ObjFun, N, D, p1, p2, Low, Up, and Maxcycle
Output: GlobalMinimum, GlobalMinimizer
// INITIALIZATION
1 GlobalMinimum=inf
2 Superorganism = [Clani]|i = 1,...,N
3 Clani,j ~ U(Lowj, Upj)|j = 1,...,D
4 Fitnessi=ObjFun(Clani)
5 for epk from 1 to Maxcycle do
  // SELECTION-I
  6 Direction = Clanpermuting([1,...,N])
  7 Mapi,j=0
  8 if a < b|a, b ~ U(0,1) then
  9   if c < p1|c ~ U(0,1) then
  10    for i from 1 to N do
  11      for j from 1 to D do
  12        if d < e|d, e ~ U(0,1) then
  13          Mapi,j = 1
  14        end
  15      end
  16    end
  17   else
  18     for i from 1 to N do
  19       Mapi,u = 1|u ~ U(1,D) and u ∈ {1,...,D}
  20     end
  21   end
  22 else
  23   for i from 1 to N do
  24     for j from 1 to ⌈p2 · D⌉ do
  25       Mapi,v = 1|v ~ U(1,D) and v ∈ {1,...,D}
  26     end
  27   end
  28 end
  29 Scale = κ-1 · Map | κ ~ Γ(1,0.50)
  // MUTATION
  30 Stopover=Superorganism+Scale ◦ (Direction-Superorganism) , ◦:Hadamard product
  // Boundary Control
  31 for i from 1 to N do
  32   for j from 1 to D do
  33     if Stopoveri,j < Lowj then Stopoveri,j = Lowj
  34     if Stopoveri,j > Upj then Stopoveri,j = Upj
  35   end
  36 end
  // SELECTION-II
  37 FitnessStopoveri = ObjFun(Stopoveri)
  38 if (FitnessStopoverw < Fitnessw)|w ∈ {1,...,N} then
  39   Fitnessw := FitnessStopoverw
  40   Superorganismw = Stopoverw
  41 end
  42 best ← Fitnessbest ≤ Fitness|best ∈ {1,2,3,...,N}
  43 if Fitnessbest < GlobalMinimum then
  44   GlobalMinimum = Fitnessbest
  45   GlobalMinimizer = Superorganismbest
  46 end
  // Export GlobalMinimum and GlobalMinimizer
47 end

```

Figure 5. Pseudo code of the Bijective-DSA (Çivicioğlu 2012).

where ω_{ij} denotes the weight value between i^{th} and j^{th} neurons. s_i is the output value of i^{th} neuron. net^i denotes the sum of neurons of i^{th} inputs. ω_{ij} is updated by using Equation 6.

$$\omega_{ij}^{(t+1)} \stackrel{update}{\leftarrow} \omega_{ij}^{(t)} + \Delta\omega_{ij}^{(t)} \quad (6)$$

In classic backpropagation learning algorithm, $\Delta\omega_{ij}$ value is generally defined by using Equation 7.

$$\Delta\omega_{ij}^{(t)} = -\varepsilon \cdot \frac{\partial E}{\partial \omega_{ij}}(t) + \mu \cdot \omega_{ij}^{(t-1)} \quad (7)$$

Here, ε is the learning rate or step size value that ensures partial derivatives to be scaled. If ε has a very low or very high value, the period of detecting the problem by neural network may increase

extremely. Momentum value (i.e μ) is used to scale the effect of $\Delta\omega_{ij}$ on previous value. There is no analytic method providing optimum values of μ for a problem. Therefore, various adaptive learning algorithms using different methods, such as Rprop, were developed for the calculation of $\Delta\omega_{ij}$. Rprop updates the weights of MLP network by handling only signs of partial derivatives as given in Equation 8;

$$\Delta\omega_{ij}^{(t)} = \begin{cases} -\Delta_{ij}^{(t)} & \text{if } \frac{\partial E^{(t)}}{\partial \omega_{ij}} > 0 \\ +\Delta_{ij}^{(t)} & \text{if } \frac{\partial E^{(t)}}{\partial \omega_{ij}} < 0 \\ 0 & \text{else} \end{cases} \quad (8)$$

In the second phase of Rprop, $\Delta_{ij}^{(t)}$ updates are calculated by using Equation 9;

$$\Delta_{ij}^{(t)} = \begin{cases} \eta^+ \cdot \Delta_{ij}^{(t-1)} & \text{if } \frac{\partial E^{(t-1)}}{\partial \omega_{ij}} \cdot \frac{\partial E^{(t)}}{\partial \omega_{ij}} > 0 \\ \eta^- \cdot \Delta_{ij}^{(t-1)} & \text{if } \frac{\partial E^{(t-1)}}{\partial \omega_{ij}} \cdot \frac{\partial E^{(t)}}{\partial \omega_{ij}} < 0 \\ \Delta_{ij}^{(t-1)} & \text{else} \end{cases} \quad (9)$$

It has been defined with $0 < \eta^- < 1 < \eta^+$ here. The partial derivative corresponding to ω_{ij} always changes its sign. Therefore, if the algorithm is hindered by a local minimum in the last update, $\Delta_{ij}^{(t)}$ value is decreased by using η^- factor. If the derivative maintains its sign, update value is increased slightly to expedite convergence to result. Additionally, if derivative sign changes, no adjustment will be made in the current learning phase. Practically, this is ensured by using $\frac{\partial E^{(t-1)}}{\partial \omega_{ij}} \xrightarrow{\text{update}} 0$ rule. In order to decrease the number of parameters to be adjusted, values of increasing and decreasing factors (i.e. η) are fixed. In this paper $\eta^- = 0.50$, $\eta^+ = 1.20$ and learning rate was fixed as $\epsilon = 0.01$ and $[\Delta_0 \Delta_{\max}] = [0.07 \ 50.00]$.

Experiments

The details of experiments conducted in this paper are given in this section. Accuracy, sensitivity, and specificity statistics, which are frequently used in binary clustering, were used to compare the clustering of data. Since our experimental study is a binary clustering (injury/death) problem, these statistical tools are used.

Evolutionary clustering-based modelling of traffic accident characteristics

Eight thousand seventy-eight observation based traffic data were obtained in total seven different road segments by Turkey General Directorate of Security. Each observation data includes 23 different parameters given in Table 2. All the observation-based data belonging to seven road segments were used when creating a traffic accident characteristics model with the evolutionary-based clustering method. One thousand data were chosen randomly among 8078 data as test data. The rest 7078 data were used as training data while solving Equation 4 with DSA. Training data set consists of 118 accidents including death (1.67%) and 6960 accidents including injury (98.33%). Testing data set consists of 36 accidents (3.6%) including death, 964 accidents (96.4%). Population size, N , and the parameters of DSA while solving Equation 4 determined experimentally 50 and $p_1 = p_2 = 0.3 \cdot \kappa \tilde{U}(0, 1)$, respectively. In Equation 4, t value was designed as a binary-valued vector that can address each accident including death and/or injury separately; [1 0]: Accident including death, [0 1]: Accident including injury. The number of searched parameters, D , $23 \times 2 = 46$ for Equation 4. $\text{MaxCycle} = 1e6$, $\text{Low}_{j=1:D} = 0$ and $\text{Up}_{j=1:D} = 1$ for DSA. Obtaining clustering results are summarized at Table 3. As a result of the experiment, 94.90% of test data were clustered correctly and 95.08% of training data were clustered correctly. Experiment results show that observation data can provide information in reliable levels to understand whether risky conditions have occurred for accidents including death or injury by using traffic accident characteristics model shown in Equation 4.

When Table 3 is analyzed, it can be clearly seen that the presented method provides high sensitivity and specificity values. Hence, evolutionary clustering-based modelling by using DSA method has a technical potential on traffic accident data analyzing.

Table 3. Statistical results for evolutionary clustering-based modelling of observation-based traffic accident data by using DSA.

Testing/Training Data	Statistical parameters			Number of data
	Accuracy (%)	Sensitivity	Specificity	
Testing	94.90	0.98	0.93	1000
Training	95.08	0.99	0.94	7088

Table 4. Basic statistics for Rprop-based regression of traffic accident data.

Road Segment	Testing/Training Data	Statistical parameters		
		Accuracy (%)	Sensitivity	Specificity
1	Testing	62.00	0.71	0.58
	Training	71.33	0.79	0.68
2	Testing	72.00	0.74	0.70
	Training	84.45	0.92	0.81
3	Testing	79.00	0.86	0.76
	Training	96.48	0.98	0.95
4	Testing	83.00	0.87	0.81
	Training	92.17	0.96	0.90
5	Testing	84.00	0.88	0.82
	Training	89.10	0.92	0.87
6	Testing	85.00	0.91	0.82
	Training	91.51	0.98	0.89
7	Testing	90.00	0.95	0.88
	Training	88.45	0.92	0.87

Resilient neural networks (rprop) based regression of traffic accident characteristics

There are 10 neurons in the hidden layer and 2 neurons in the output layer of MLP network used in the experiments performed. Tangent-Sigmoid (tansig) activation function in the input layer and the linear activation function in the output layer was used. MLP networks were trained through 100000 epochs by using Rprop. Tests were made for each road segment separately. Each test data includes 100 patterns chosen randomly. The neurons on output layer produce output data corresponding to the cases of death (i.e. [1 0]) and injury (i.e. [0 1]) Only [0.95] and higher output values were interpreted in order to avoid the problems that may be caused by misleading post-processing interpretations and evaluate test results with bias. Test results were listed according to test successes in Table 4. According to experimental results, MLP Rprop traffic accident characteristics model can show whether a random observation data have necessary conditions for the occurrence of traffic accidents including death or injury with 62–90% accuracy, 0.71–0.95 sensitivity and 0.58–0.88 specificity for testing data and 71–97% accuracy, 0.79–0.98 sensitivity and 0.68–0.95 specificity for training data.

Conclusions

Traffic accidents have deep socio-economic effects because they cause death, labor force loss and financial loss. It is very important to determine traffic accident characteristics to understand whether conditions necessary for the occurrence of traffic accidents are present. Traffic accident characteristics depends on the analysis of whether observation data are in accordance with estimated results. Therefore, traffic accident characteristics require establishing analytical relations between observation data and estimated results. However, because of the complex nature of the parameters of traffic accidents, it is practically difficult to develop analytical models between observation data and estimated results. Two different traffic accident characteristics analyses have been performed by using two different methods: evolutionary search-based data clustering and artificial neural networks

based methods. Experiment results show that these methods can compute whether there is a risk of traffic accident including death or injury with a high level of accuracy according to observation data for accident characteristics. The results obtained by using the observation-based traffic data used in this paper are listed below:

- (1) A new DSA-based conditional clustering has been developed to the modelling of traffic accident characteristics.
- (2) MLP-Rprop traffic accident characteristics model is very successful in understanding whether observation data have necessary conditions for the occurrence of a traffic accident with death or injury.
- (3) Modelling parameters that cause death and injury is very important for reducing and preventing traffic accidents.
- (4) In order to reduce traffic accidents, it is necessary to examine the parameters such as road geometry, vehicle and human factor, road design, and road operation conditions separately.
- (5) Observation data are very effective in modelling traffic accident characteristics.
- (6) In order to better understand the relationships between the parameters affecting traffic accidents, the evaluation of all proposed parameters and rearranging the traffic accident report according to these parameters will prevent the traffic accidents.

In the traffic accidents that occur every year, many people lose their lives, are injured; are partially or completely left outside of the labor market. It is necessary to develop new analytical models in order to understand the factors affecting the occurrence of traffic accidents and to determine what changes in the instantaneous traffic parameters observed pose a traffic accident risk. Future scientific efforts will focus on developing analytical or heuristic methods that can identify risks that threaten to manage traffic networks more efficiently.

Disclosure Statement

No potential conflict of interest was reported by the authors.

ORCID

Emre Tercan  <http://orcid.org/0000-0001-6309-1083>
 Erkan Beşdok  <http://orcid.org/0000-0001-9309-375X>
 Serkan Tapkın  <http://orcid.org/0000-0003-1417-9972>

References

- Al-Ghamdi, A. 2002. "Using Logistic Regression to Estimate the Influence of Accident Factors on Accident Severity." *Accident Analysis and Prevention* 34 (6): 729–741. doi:10.1016/S0001-4575(01)00073-2.
- Alhalabi, W., and E. N. Dragoi. 2017. "Influence of Randomization Strategies and Problem Characteristics on the Performance of Differential Search Algorithm." *Applied Soft Computing* 61: 88–110. doi:10.1016/j.asoc.2017.08.001.
- Alikhani, M., A. Nedaie, and A. Ahmadvand. 2013. "Presentation of Clustering Classification Heuristic Method for Improvement Accuracy in Classification of Severity of Road Accidents in Iran." *Safety Science* 60: 142–150. doi:10.1590/S0034-8910.2013047003657.
- Almeida, R. L. F., J. G. B. Filho, J. U. Braga, F. B. Magalhaes, M. C. M. Macedo, and K. A. Silva. 2013. "Man, Road and Vehicle: Risk Factors Associated with the Severity of Traffic Accidents." *Revista De Saude Publica* 47 (4): 718–731. doi:10.1590/S0034-8910.2013047003657.
- Arenas Ramirez, B., F. Aparicio Izquierdo, C. Gonzalez Fernandez, and A. Gomez Mendez. 2009. "The Influence of Heavy Goods Vehicle Traffic on Accidents on Different Types of Spanish Interurban Roads." *Accident Analysis and Prevention* 41 (1): 15–24. doi:10.1016/j.aap.2008.07.016.
- Bedard, M., G. Guyatt, M. Stones, and J. Hirdes. 2002. "The Independent Contribution of Driver, Crash, and Vehicle Characteristics to Driver Fatalities." *Accident Analysis and Prevention* 34 (6): 717–727. doi:10.1016/S0001-4575(01)00072-0.
- Beşdok, E., P. Çivicioğlu, and M. Alci. 2004. "Impulsive Noise Suppression from Highly Corrupted Images by Using Resilient Neural Networks." *LNAI* 3070: 670–675.
- Bezdek, J. C., R. Ehrlich, and W. Full. 1984. "FCM - the Fuzzy C-Means Clustering-algorithm." *Computers & Geosciences* 10 (2–3): 191–203. doi:10.1016/0098-3004(84)90020-7.
- Briz-Redon, A., F. Martinez-Ruiz, and F. Montes. 2019a. "Spatial Analysis of Traffic Accidents near and between Road Intersections in a Directed Linear Network." *Accident Analysis and Prevention* 132: 105252. doi:10.1016/j.aap.2019.07.028.
- Briz-Redon, A., F. Martinez-Ruiz, and F. Montes. 2019b. "Estimating the Occurrence of Traffic Accidents near School Locations: A Case Study from Valencia (Spain) Including Several Approaches." *Accident Analysis and Prevention* 132: 105237. doi:10.1016/j.aap.2019.07.013.
- Burger, N. E., D. T. Kaffine, and B. Yu. 2014. "Did California's Hand-held Cell Phone Ban Reduce Accidents?" *Transportation Research Part A* 66: 162–172. doi:10.1016/j.tra.2014.05.008.
- Calinski, T., and J. Harabasz. 1974. "A Dendrite Method for Cluster Analysis." *Communications in Statistics-theory and Methods* 3 (1): 1–27. doi:10.1080/03610927408827101.
- Chang, L. Y., and J. T. Chien. 2013. "Analysis of Driver Injury Severity in Truck-involved Accidents Using a Non-parametric Classification Tree Model." *Safety Science* 5 (1): 17–22. doi:10.1016/j.ssci.2012.06.017.
- Chang, L. Y., and H. W. Wang. 2006. "Analysis of Traffic Injury Severity: An Application of Non-parametric Classification Tree Techniques." *Accident Analysis and Prevention* 38 (5): 1019–1027. doi:10.1016/j.aap.2006.04.009.
- Chen, Y., X. Zhang, Y. Feng, J. Liang, and H. Chen. 2015. "Sunburst with Ordered Nodes Based on Hierarchical Clustering: A Visual Analyzing Method for Associated Hierarchical Pesticide Residue Data." *Journal of Visualization* 18 (2): 237–254. doi:10.1007/s12650-014-0269-3.
- Chowdhury, N., and C. A. Murthy. 1997. "Minimal Spanning Tree Based Clustering Technique: Relationship with Bayes Classifier." *Pattern Recognition* 30 (11): 1919–1929. doi:10.1016/S0031-3203(96)00188-4.
- Çivicioğlu, P. 2012. "Transforming Geocentric Cartesian Coordinates to Geodetic Coordinates by Using Differential Search Algorithm." *Computers & Geosciences* 46: 229–247. doi:10.1016/j.cageo.2011.12.011.
- Çivicioğlu, P., E. Beşdok, M. A. Günen, and U. H. Atasever. 2018. "Weighted Differential Evolution Algorithm for Numerical Function Optimization: A Comparative Study with Cuckoo Search, Artificial Bee Colony, Adaptive Differential Evolution, and Backtracking Search Optimization Algorithms." *Neural Computing and Applications*: 1–15. doi:10.1007/s00521-018-3822-5.
- De Ona, J., G. Lopez, R. O. Mujalli, and F. J. Calvo. 2013. "Analysis of Traffic Accidents on Rural Highways Using Latent Class Clustering and Bayesian Networks." *Accident Analysis and Prevention* 51: 1–10. doi:10.1016/j.aap.2012.10.016.
- De Ona, J., R. O. Mujalli, and F. J. Calvo. 2011. "Analysis of Traffic Accident Injury Severity on Spanish Rural Highways Using Bayesian Networks." *Accident Analysis and Prevention* 43 (1): 402–411. doi:10.1016/j.aap.2010.09.010.
- Delen, D., R. Sharda, and M. Bessonov. 2006. "Identifying Significant Predictors of Injury Severity in Traffic Accidents Using a Series of Artificial Neural Networks." *Accident Analysis and Prevention* 38 (3): 434–444. doi:10.1016/j.aap.2005.06.024.
- Dutta, M., A. Chatterjee, and A. Rakshit. 2006. "Intelligent Phase Correction in Automatic Digital Ac Bridges by Resilient Backpropagation Neural Network." *Measurement* 39 (10): 884–891. doi:10.1016/j.measurement.2006.07.001.
- Fan, Z., C. Liu, D. Cai, and S. Yue. 2019. "Research on Black Spot Identification of Safety in Urban Traffic Accidents Based on Machine Learning Method." *Safety Science* 118: 607–616. doi:10.1016/j.ssci.2019.05.039.
- GDH. 2017. Summary of traffic accidents in Turkey, General Directorate of Highways.
- Gomei, S., M. Hitosugi, K. Ikegami, and S. Tokudome. 2013. "Assessing Injury Severity in Bicyclists Involved in Traffic Accidents to More Effectively Prevent Fatal Bicycle Injuries in Japan." *Medicine Science and the Law* 53 (4): 194–198. doi:10.1177/0025802413481011.
- Guha, D., P. K. Roy, and S. Banerjee. 2017. "Study of Differential Search Algorithm Based Automatic Generation Control of an Interconnected Thermal-thermal System with Governor Dead-band." *Applied Soft Computing* 52: 160–175. doi:10.1016/j.asoc.2016.12.012.
- Günen, M. A., Ü. H. Atasever, and E. Beşdok. 2017. "A Novel Edge Detection Approach Based on Backtracking Search Optimization Algorithm (BSA) Clustering." In *2017 IEEE 8th International Conference on Information Technology (ICIT)*, 116–122.
- Günen, M. A., P. Çivicioğlu, and E. Beşdok. 2016. "Differential Search Algorithm Based Edge Detection." *The International Archives of Photogrammetry, Remote Sensing and Spatial Information Sciences* 41: 667. doi:10.5194/ispr-sarchives-XLI-B7-667-2016.

- Gunter, S., and H. Bunke. 2003. "Validation Indices for Graph Clustering." *Pattern Recognition Letters* 24 (8): 1107–1113. doi:10.1016/S0167-8655(02)00257-X.
- Hong, T. P., C. H. Chen, and F. S. Lin. 2015. "Using Group Genetic Algorithm to Improve Performance of Attribute Clustering." *Applied Soft Computing* 29: 371–378. doi:10.1016/j.asoc.2015.01.001.
- Hsu, Y. C., Y. M. Shiu, P. L. Chou, and Y. M. J. Chen. 2015. "Vehicle Insurance and the Risk of Road Traffic Accidents." *Transportation Research Part A-Policy and Practice* 74: 201–209. doi:10.1016/j.tra.2015.02.015.
- Jafari, S. A., S. Jahandideh, M. Jahandideh, and E. B. Asadabadi. 2015. "Prediction of Road Traffic Death Rate Using Neural Networks Optimised by Genetic Algorithm." *International Journal of Injury Control and Safety Promotion* 22 (2): 153–157. doi:10.1080/17457300.2013.857695.
- Jain, A. K., M. N. Murty, and P. J. Flynn. 1999. "Data Clustering: A Review." *ACM Computing Surveys* 31 (3): 264–323. doi:10.1145/331499.331504.
- Jung, S., X. Qin, and C. Oh. 2016. "Improving Strategic Policies for Pedestrian Safety Enhancement Using Classification Tree Modeling." *Transportation Research Part A* 85: 53–64. doi:10.1016/j.tra.2016.01.002.
- Kanungo, T., D. M. Mount, N. S. Netanyahu, C. D. Piatko, R. Silverman, and A. Y. Wu. 2002. "An Efficient K-means Clustering Algorithm: Analysis and Implementation." *IEEE Transactions on Pattern Analysis and Machine Intelligence* 24 (7): 881–892. doi:10.1109/TPAMI.2002.1017616.
- Karimnezhad, A., and F. Moradi. 2017. "Road Accident Data Analysis Using Bayesian Networks." *Transportation Letters-The International Journal of Transportation Research* 9 (1): 12–19. doi:10.1080/19427867.2015.1131960.
- Kashani, A. T., and A. S. Mohayman. 2011. "Analysis of the Traffic Injury Severity on Two-lane, Two-way Rural Roads Based on Classification Tree Models." *Safety Science* 49 (10): 1314–1320. doi:10.1016/j.ssci.2011.04.019.
- Kohonen, T. 1990. "The Self-Organizing Map." *Proceedings of the IEEE* 78 (9): 1464–1480. doi:10.1109/5.58325.
- Kumar, S., D. Toshniwal, and M. Parida. 2017. "A Comparative Analysis of Heterogeneity in Road Accident Data Using Data Mining Techniques." *Evolving Systems* 8: 147–155. doi:10.1007/s12530-016-9165-5.
- Kunt, M. M., I. Aghayan, and N. Noii. 2012. "Prediction for Traffic Accident Severity Comparing the ANN, Genetic Algorithm, Combined Genetic Algorithm and Pattern Search Methods." *Transport* 26 (4): 353–366. doi:10.3846/16484142.2011.635465.
- Liu, D., D. Solomon, and L. Hardy. 2015. "Investigating Injury Occurrence in Motor Vehicle Collision Using Artificial Neural Networks." *Human Factors and Ergonomics in Manufacturing & Service Industries* 25: 294–303. doi:10.1002/hfm.v25.3.
- Lord, D., and F. Mannering. 2010. "The Statistical Analysis of Crash-frequency Data: A Review and Assessment of Methodological Alternatives." *Transportation Research Part A* 44 (5): 291–305. doi:10.1016/j.tra.2010.02.001.
- Ma, X. B., F. C. Lin, and Y. Zhao. 2015. "An Adjustment to the Bartlett's Test for Small Sample Size." *Communications in Statistics-Simulation and Computation* 44 (1): 257–269. doi:10.1080/03610918.2013.773347.
- Maugis, C., G. Celeux, and M. L. Martin-Magniette. 2009. "Variable Selection for Clustering with Gaussian Mixture Models." *Biometrics* 65 (3): 701–709. doi:10.1111/j.1541-0420.2008.01160.x.
- Moghaddam, F., M. Ziyadi, and S. Afandizadeh. 2011. "Prediction of Accident Severity Using Artificial Neural Networks." *International Journal of Civil Engineering* 9 (1): 41–48.
- Moradi, A., S. S. H. Nazari, and R. Khaled. 2019. "Sleepiness and the Risk of Road Traffic Accidents: A Systematic Review and Meta-analysis of Previous Studies." *Transportation Research Part F-Traffic Psychology and Behaviour* 65: 620–629. doi:10.1016/j.trf.2018.09.013.
- Mujalli, R. O., and J. De Ona. 2011. "A Method for Simplifying the Analysis of Traffic Accidents Injury Severity on Two-lane Highways Using Bayesian Networks." *Journal of Safety Research* 42 (5): 317–326. doi:10.1016/j.jsr.2011.06.010.
- Nikolaev, A. G., M. J. Robbins, and S. H. Jacobson. 2010. "Evaluating the Impact of Legislation Prohibiting Hand-held Cell Phone Use while Driving." *Transportation Research Part A* 44: 182–193. doi:10.1016/j.tra.2010.01.006.
- Ruxanda, G., and I. Smeureanu. 2012. "Unsupervised Learning with Expected Maximization Algorithm." *Economic Computation and Economic Cybernetics Studies and Research* 46 (1): 17–44.
- Ryder, B., B. Gahr, P. Ego, A. Dahlinger, and F. Wortmann. 2017. "Preventing Traffic Accidents with In-vehicle Decision Support systems-The Impact of Accident Hotspot Warnings on Driver Behaviour." *Decision Support Systems* 99: 64–74. doi:10.1016/j.dss.2017.05.004.
- Saini, L. M. 2008. "Peak Load Forecasting Using Bayesian Regularization, Resilient and Adaptive Backpropagation Learning Based Artificial Neural Networks." *Electric Power Systems Research* 78 (7): 1302–1310.
- Shafabakhsh, G. A., A. Famili, and M. Akbari. 2016. "Spatial Analysis of Data Frequency and Severity of Rural Accidents." *Transportation Letters-The International Journal of Transportation Research*: 1–8. doi:10.1080/19427867.2016.1138605.
- Slupas, T., and Z. Bazaras. 2013. "Forecasting the Risk of Traffic Accidents by Using the Artificial Neural Networks." *Baltic Journal of Road and Bridge Engineering* 8 (4): 289–293. doi:10.3846/bjrbe.2013.37.
- Sutlovic, D., A. Scepanovic, M. Bosnjak, M. J. Bratinovic, and M. D. Gojanovic. 2014. "The Role of Alcohol in Road Traffic Accidents with Fatal Outcome: 10-year Period in Croatia Split- Dalmatia County." *Traffic Injury Prevention* 15 (3): 222–227. doi:10.1080/15389588.2013.804915.
- Teran-Santos, J., A. Jimenez-Gomez, and J. Cordero-Guevara. 1999. "The Association between Sleep Apnea and the Risk of Traffic Accidents." *New England Journal of Medicine* 340 (11): 847–851. doi:10.1056/NEJM199903183401104.
- Thakur, G. S. 2014. "Fuzzy Soft Traffic Accident Alert Model." *National Academy Science Letters* 37 (3): 261–268. doi:10.1007/s40009-014-0235-6.
- Thomas, J. 1990. "Road Traffic Accidents before and after Seatbelt Legislation - Study in a District General-hospital." *Journal of the Royal Society of Medicine* 83 (2): 79–81. doi:10.1177/014107689008300207.
- Tibshirani, R., G. Walther, and T. Hastie. 2001. "Estimating the Number of Clusters in a Data Set via the Gap Statistic." *Journal of the Royal Statistical Society Series B-Statistical Methodology* 63: 411–423. doi:10.1111/1467-9868.00293.
- Traffic Statistics. 2018. Accessed 29 January 2020. <https://www.kgm.gov.tr/SiteCollectionDocuments/KGMdocuments/Trafik/TrafikKazalariOzeti2018.pdf>
- Turkish Road Network Map. 2020. Accessed 30 January 2020. http://turkiyeharitasi.com/karayollari_haritasi/
- Van Beeck, E. F., G. J. Borsboom, and J. P. Mackenbach. 2000. "Economic Development and Traffic Accident Mortality in the Industrialized World." *International Journal of Epidemiology* 29 (3): 503–509. doi:10.1093/ije/29.3.503.
- Wang, J., W. Yuan, and D. Cheng. 2015. "Hybrid Genetic-particle Swarm Algorithm: An Efficient Method for Fast Optimization of Atomic Clusters." *Computational and Theoretical Chemistry* 1059: 12–17. doi:10.1016/j.comptc.2015.02.003.
- Wang, Y., L. Li, L. Feng, and H. Peng. 2014. "Professional Drivers' Views on Risky Driving Behaviors and Accident Liability: A Questionnaire Survey in Xining, China." *Transportation Letters-The International Journal of Transportation Research* 6 (3): 126–135. doi:10.1179/1942787514Y.0000000019.
- WHO. 2009. *Global Status Report on Road Safety Time for Action*. Switzerland: World Health Organization, Department of Violence, Injury Prevention and Disability (VIP). ISBN 978 92 4156384.
- Xu, C., C. Wang, Y. Ding, and W. Wang. 2018. *Investigation of Extremely Severe Traffic Crashes Using Fault Tree Analysis*. Transportation Letters-The International Journal of Transportation Research. doi:10.1080/19427867.2018.1540146.
- Yau, K. K. W., H. P. Lo, and S. H. H. Fung. 2006. "Multiple-vehicle Traffic Accidents in Hong Kong." *Accident Analysis and Prevention* 38: 1157–1161. doi:10.1016/j.aap.2006.05.002.
- Zeng, Q., H. Huang, X. Pei, and S. C. Wong. 2016. "Modeling Nonlinear Relationship between Crash Frequency by Severity and Contributing Factors by Neural Networks." *Analytic Methods in Accident Research* 10: 12–25. doi:10.1016/j.amar.2016.03.002.